

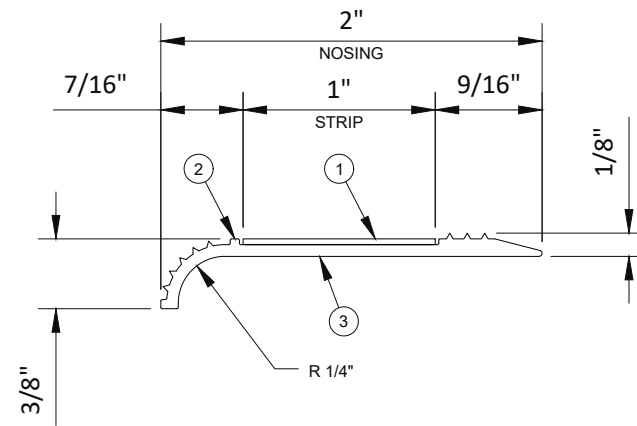


SPECIFICATIONS / OPTIONS:


- ① 1" STRIP:
(a) Photo-Glo STNF (photoluminescent extruded polymer)
(b) Photo-Glo S9203 (photoluminescent acrylic tape)
(c) Traction Yellow (anti-slip tape)
(d) Traction Black (anti-slip tape)
- ② EXTRUDED ALUMINUM ALLOY 6063-T5
(a) Mill Finish
(b) Clear Anodize
(c) Yellow Powder Coat
(d) Black Powder Coat
- ③ ATTACHMENT:
(a) Liquid Adhesive
(b) Self-Tapping Screw
- ④ LENGTH: 12'-0" MAX.
- ⑤ ASTM E2072 / UL 1994 / Title 24 Compliant

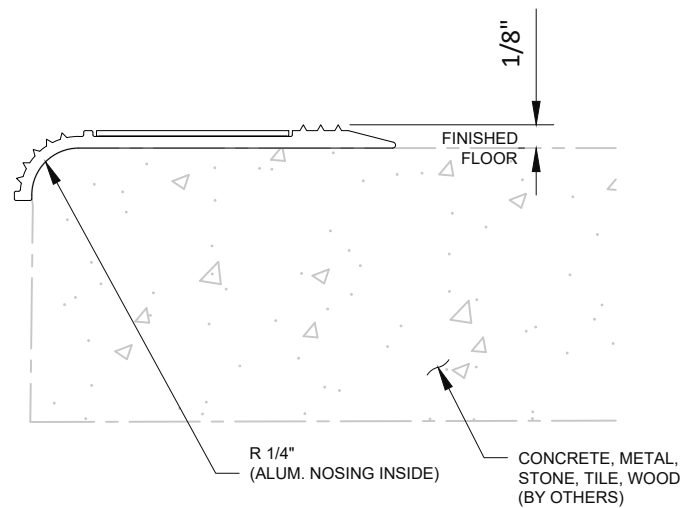


A NOSING ASSEMBLY DETAIL

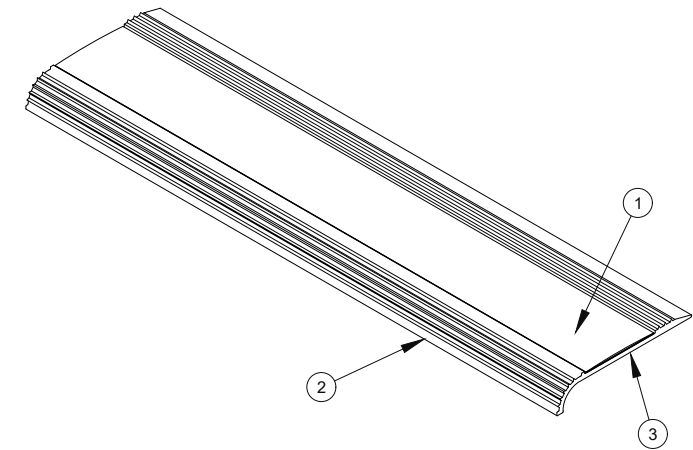


D1 GENERAL SURFACE MOUNT INSTALL
(LIQUID ADHESIVE ATTACHMENT)

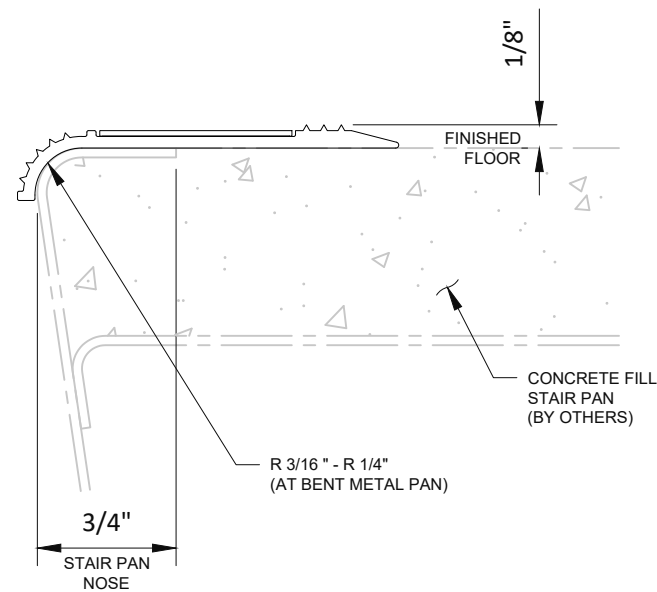

D2 SURFACE MOUNT CONCRETE PAN FILLED STAIR INSTALL
(LIQUID ADHESIVE ATTACHMENT)

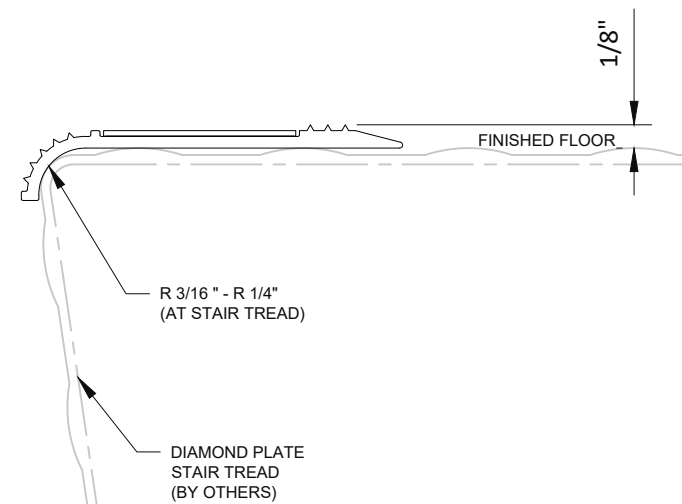

D3 SURFACE MOUNT DIAMOND PLATE STAIR INSTALL
(LIQUID ADHESIVE ATTACHMENT)

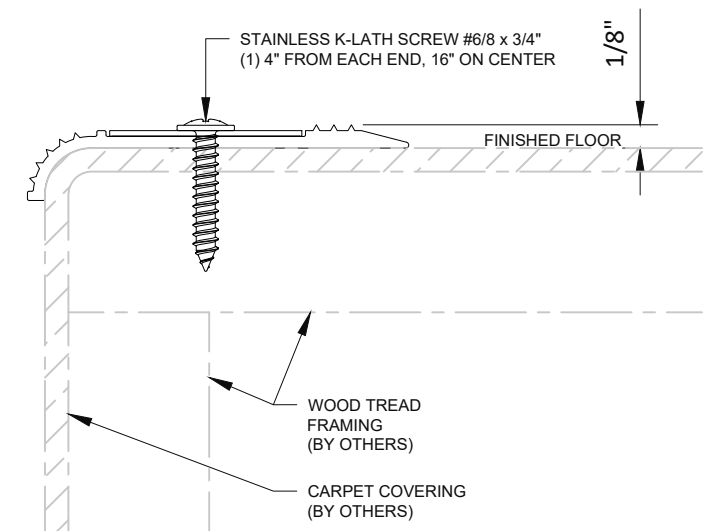

D4 SURFACE MOUNT CARPET STAIR INSTALL
(SCREW ATTACHMENT)

SURFACE MOUNT
2" STAIR NOSING

MODEL #: STNR | DWG #: STNR-01

Safe-T-Nose

Photo-Glo

WWW.SAFETNOSE.COM
1-855-723-6673 | SALES@SAFETNOSE.COM