

## STN | SURFACE MOUNT / RETROFIT INSTALLATION, MAINTENANCE & WARRANTY

**Ideal for any application that allows the nosing to be mounted with adhesive.**

Install on existing stairs in High Rise Buildings, Stadiums, Bleachers, Industrial Plants, Homes, Businesses, Schools – Interior or Exterior. Applies to concrete, aluminum, wood, or any other clean, dry, flat surface.

**For compliant placement of egress path markings, consult your applicable local or national codes (2009, 2012 IBC section 1024 + 2015 IBC section 1025).**

### STNR: INSTALLATION STEPS


- 1 Verify the surface is clean, dry, flat and smooth.**
  - On concrete, use a leveling compound if necessary, to provide a level/smooth surface.
  - Use dry cloth and non-residue cleaning compound to remove dirt and grime.
- 2 Use construction grade (water resistant) adhesive.**
  - Recommended Adhesive: Bostik 1100FS or 70-03A.
  - Place nosing in place, centered on front edge of tread.
  - Apply continuous bead of adhesive (centered) on underside of nosing.
- 3 Place and press nosing centered on front edge of tread.**
  - Tape the nosing in place with painter's tape while curing.
  - Allow adhesive rated cure time before stair use.

### PHOTO-GLO CHARGE INSTRUCTION

Minimum of 1-foot candle (11 Lux) of fluorescent, incandescent or LED (light emitting diode) for 60 Minutes is required to charge Photo-Glo.

Control of lighting restricted to authorized personnel. Reliable external illumination is always required during building occupancy.

Do not use Photo-Glo where the ambient illumination level is less than 1-foot candle (11Lux).

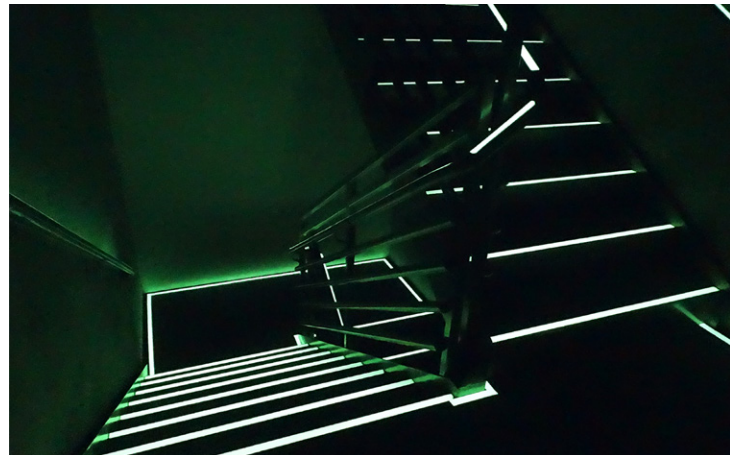

### INSTALLATION INSPECTION

Check regularly for loose nosing's or damaged components. Replace damaged components, repair delaminated Photo-Glo components as required.

**IF YOU HAVE FURTHER  
QUESTIONS, PLEASE CONTACT US**

## **STNR | SURFACE MOUNT / RETROFIT INSTALLATION, MAINTENANCE & WARRANTY**

### **STNR: CLEANING**

**Establish a regular inspection schedule for the photoluminescent components and clean them as needed to prevent dirt, etc. from inhibiting the performance of the components.**

Safe-T-Nose, Inc. recommends inspection at least annually or after any particularly heavy use. Perform inspections in accordance with applicable local and national code requirements.

Photoluminescent components attached to floor assemblies may be cleaned by mopping, using high-pressure water (NO STEAM CLEANING) or wiping with a clean damp cloth. Use mild detergents to clean the photoluminescent components, if necessary. Mild dish washing detergents or laundry detergents are recommended. Do not use highly alkaline detergents, those having a ph >8, or acidic cleaners, those having a ph <5.

Do not use abrasive cleaners. Photoluminescent components on walls or other assemblies or components may be cleaned using clean water and a clean sponge or a clean cotton cloth. Rinse after applying detergent solution. Wipe with a clean cotton cloth to dry.

### **STNR: REGULAR MAINTENANCE**

Inspect exit path markings, obstacle markings and photoluminescent stair nosings for damaged components and to ensure that photoluminescent components remain properly attached to their substrate and that no loosening of anchors or delamination of photoluminescent components has occurred.

Replace damaged components. Repair delaminated photoluminescent components. Contact the factory for repair recommendations. Delaminated photoluminescent components in stair nosings can result in trip hazard.

**If you have further questions, please email or call us at the contact information listed below.**

## **STNR | SURFACE MOUNT / RETROFIT INSTALLATION, MAINTENANCE & WARRANTY**

### **STNR: PRODUCT WARRANTY**

**Safe-T-Nose LLC warrants that all products; 1) glow material: being within 5% of the original output and 2) non-photoluminescent materials: will be free of manufacturing and material defects, from the date of purchase.**

- Photo-Glo materials (STNH & STNF) – 25 year
- All other photoluminescent materials – 5 year
- Exit Signs – 10 year
- All non-photoluminescent materials – 5 year>8, or acidic cleaners, those having a pH <5. Do not use abrasive cleaners. Photoluminescent components on walls or other assemblies or components may be cleaned using clean water and a clean sponge or a clean cotton cloth. Rinse after applying detergent solution. Wipe with a clean cotton cloth to dry.

Any defective product will be replaced or repaired free of any charge if a claim is brought to our attention, in writing, within one year following the date of purchase, and if our examination shows the product has failed under the terms of this warranty. Our liability under this warranty is limited to repair or replacement of material; we will not be responsible for installation costs involved in such repair or replacement. It is further agreed and understood that the price stated for the seller's products is consideration for the limitation of seller's liability hereunder and that this Warranty shall become effective only upon payment in full for the products furnished for this project.

This warranty supersedes and is in lieu of all other warranties or guarantees whether written or oral, express, or implied, including, without limitation, warranties of merchantability and fitness for a particular purpose.

This limited warranty shall be the owner's sole and exclusive remedy against Safe-T-Nose, Inc. Safe-T-Nose LLC. shall not be liable for any consequential, special, incidental or other damages including, but not limited to, loss of profits, damage to the building, or its contents, nor shall they be liable for any damages which are based on negligence, breach of warranty, strict liability, or any other theory, other than the limited liability set forth herein.

**If you have further questions, please email or call us at the contact information listed below.**