

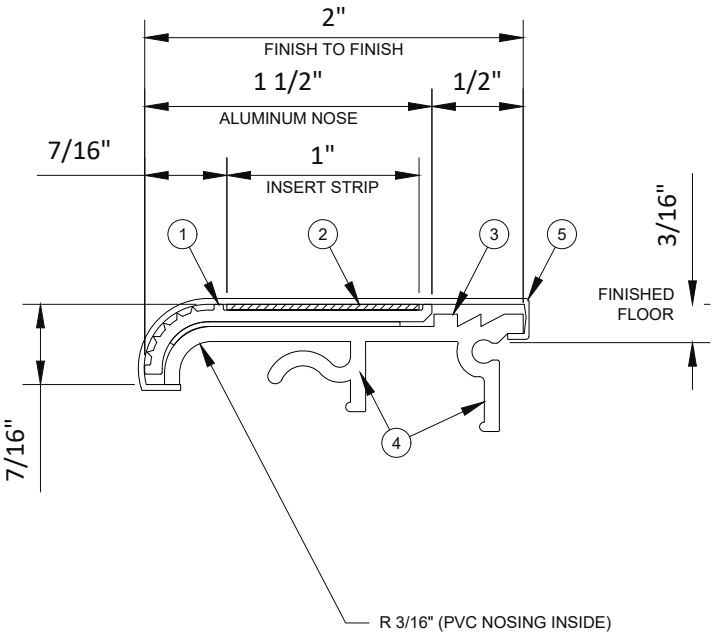


SPECIFICATIONS:

- 1. EXTRUDED ALUMINUM ALLOY 6063-T5
 - (a) Mill Finish
 - (b) Clear Anodize
 - (c) Yellow Powder Coat
 - (d) Black Powder Coat
- 2. 1" INSERT STRIP (shop applied):
 - (a) Photo-Glo STNF
 - (b) Photo-Glo S9203
 - (c) Traction Yellow
 - (d) Traction Black
- 3. PVC ISOLATOR (for contrast, pan connection, embed):
 - (a) Yellow
 - (b) Black
 - (c) Gray
- 4. ATTACHMENT:
 - Embedded into wet concrete.
- 5. REMOVABLE CONSTRUCTION COVER:
 - (a) Included (shop applied)
 - (b) Excluded (not needed)
- 6. LENGTH: 12' - 0" MAX.
- 7. ASTM 2072 / UL 1994

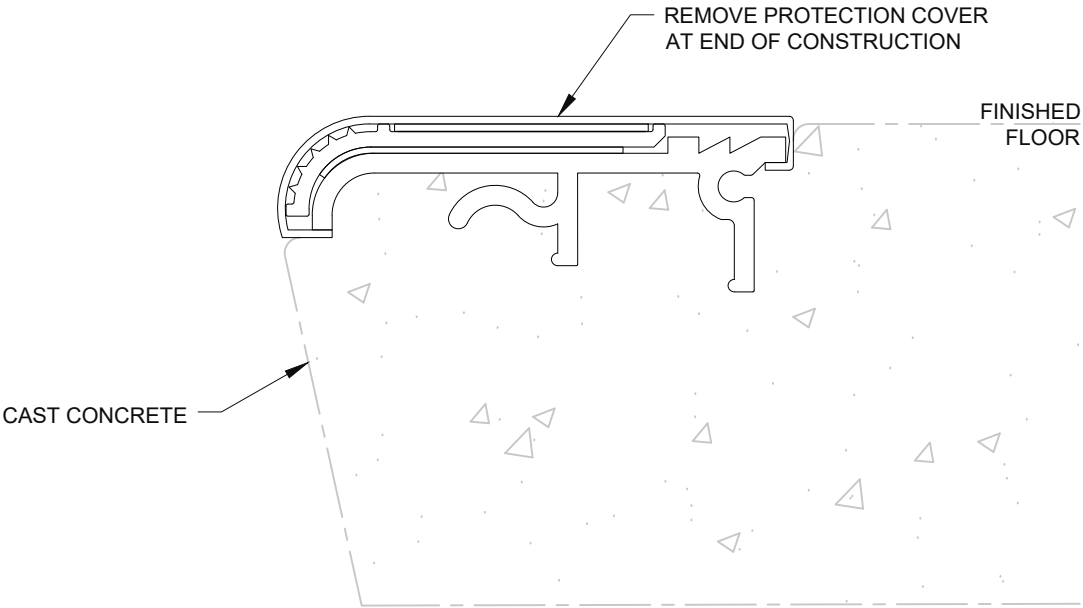

A NOSING ASSEMBLY DETAIL

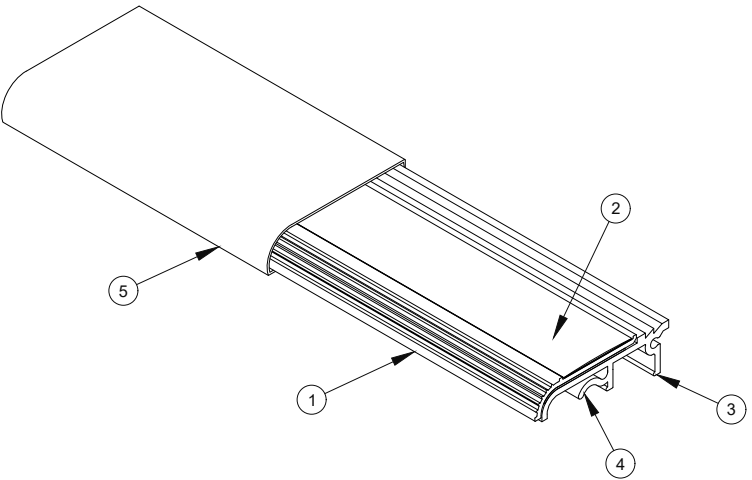

D1 CAST-IN-PLACE CONCRETE DETAIL

CAST-IN-PLACE
2" STAIR NOSING

MODEL #: STNC | DWG #: STNC-01